

LIGHT BAR Ultra OUTDOOR

☞ LED 240W / 288W / 360W **37 lm/W**



Características mecánicas Mechanical specifications



RGBW
4 in 1



RGBWA
5 in 1



RGBWA+UV
6 in 1

Material del cuerpo: aleación de aluminio

Housing material: aluminum alloy

Material de la lente: PMMA

Lens material

Acabado: pintado en plata


Finish: painted with silver

Tamaño: L1060w x W170 x H90mm

Size

Basculación: 150°

Tilting

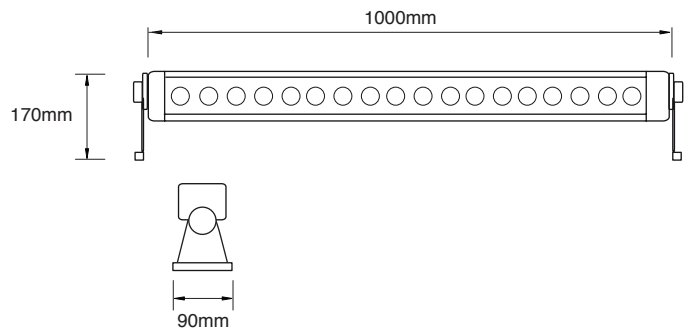

Características ópticas Optical specifications

LED: Power LED
LED PREMIUM (OPTIONAL)

N° LEDs: 24 pcs (10W) - 4 in 1
24 pcs (12W) - 5 in 1
24 pcs (15W) - 6 in 1

Potencias: 240W - 4 in 1

Power 288W - 5 in 1

360W - 6 in 1

Eficacia: 37 lm/W

Efficacy

IRC (CRI): >80

Color: RGBW - 4 in 1

RGBWA - 5 in 1

RGBWA+UV - 6 in 1

Temperatura de color: 2700K - 6500K

Color temperature

Ángulo de apertura: 15° / 25° / 45° / 60°

Beam angle

Temperatura de trabajo: -30°C +50°C


Work temperature

Vida útil: L80 B10 / 50.000 h / 25°C

L90 B10 / 105.000 h / 25°C (LED PREMIUM)

Lifespan

Modelo 54W

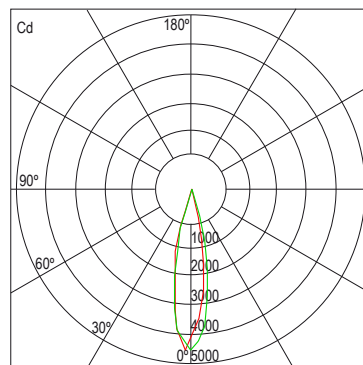

Características eléctricas Electrical specifications

Driver: Integrado

Driver: Integrated

Voltaje de entrada: 90-240V AC

Input voltage

Frecuencia: 50/60 Hz

Frecuency

Factor de potencia: >0.9

Power factor

Modo de trabajo: Independiente, DMX 512, Maestro/esclavo, Auto.

Working mode: Independent, DMX 512, Master/slave, Auto programs.

Control canales: 4/8 DMX512 channel

Control channel

Conector in/out: waterproof IEC standar,

Data 3-XLR

Oscurecimiento: 0-100% suave atenuación

Dimming: 0-100% smooth linear dimming